


## Dimensions of pump assembly

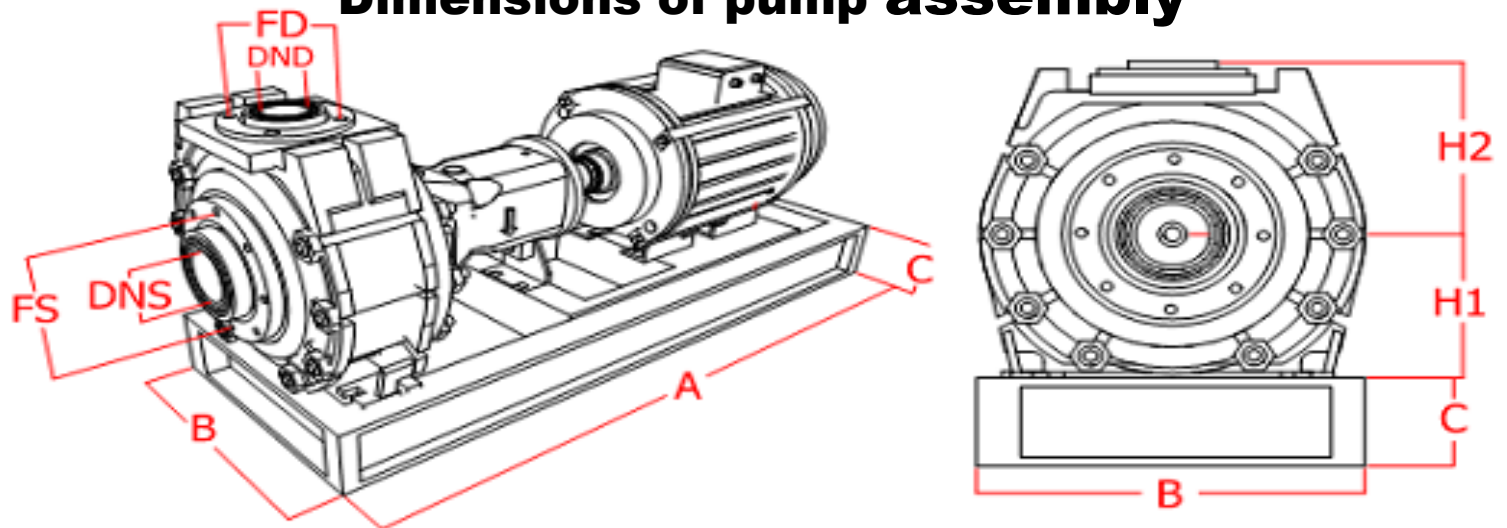

| تیپ پمپ             | ورودی و خروجی پمپ |     | اندازه فلنج |     | سایز پیچ | ارتفاع پمپ |     | اندازه شاسی فولادی |     |     | فریم |
|---------------------|-------------------|-----|-------------|-----|----------|------------|-----|--------------------|-----|-----|------|
|                     | DNS               | DND | FS          | FD  |          | H1         | H2  | A                  | B   | C   |      |
| سری CO N            |                   |     |             |     | Z        |            |     |                    |     |     |      |
| 50 - 32 - 160       | 50                | 32  | 125         | 100 | 12       | 160        | 180 | 100                | 40  | 11  | 320  |
| 50 - 32 - 200       | 50                | 32  | 125         | 100 | 12       | 160        | 180 | 100                | 40  | 11  | 320  |
| 50 - 32 - 250       | 50                | 32  | 125         | 100 | 16       | 200        | 260 | 110                | 45  | 15  | 400  |
| 65 - 40 - 160       | 65                | 40  | 145         | 110 | 12       | 160        | 180 | 100                | 40  | 11  | 320  |
| 65 - 40 - 200       | 65                | 40  | 145         | 110 | 12       | 160        | 180 | 100                | 40  | 11  | 320  |
| 65 - 40 - 250       | 65                | 40  | 145         | 110 | 16       | 200        | 260 | 110                | 48  | 15  | 400  |
| 65 - 40 - 315       | 65                | 40  | 145         | 110 | 16       | 225        | 285 | 200                | 48  | 15  | 450  |
| 80 - 50 - 160       | 80                | 50  | 160         | 125 | 12       | 160        | 180 | 100                | 40  | 11  | 320  |
| 80 - 50 - 200       | 80                | 50  | 160         | 125 | 12       | 160        | 180 | 100                | 40  | 11  | 320  |
| 80 - 50 - 250       | 80                | 50  | 160         | 125 | 16       | 200        | 265 | 110                | 48  | 15  | 400  |
| 80 - 50 - 315       | 80                | 50  | 160         | 125 | 16       | 225        | 290 | 200                | 48  | 15  | 450  |
| 100 - 65 - 160      | 100               | 65  | 180         | 145 | 16       | 180        | 245 | 110                | 45  | 15  | 360  |
| 100 - 65 - 200      | 100               | 65  | 180         | 145 | 16       | 180        | 245 | 110                | 45  | 15  | 360  |
| 100 - 65 - 250      | 100               | 65  | 180         | 145 | 16       | 200        | 265 | 110                | 48  | 15  | 400  |
| 100 - 65 - 315      | 100               | 65  | 180         | 145 | 16       | 225        | 290 | 200                | 48  | 15  | 450  |
| 125 - 80 - 160      | 125               | 80  | 210         | 160 | 16       | 180        | 245 | 110                | 45  | 15  | 360  |
| 125 - 80 - 200      | 125               | 80  | 210         | 160 | 16       | 180        | 245 | 110                | 45  | 15  | 360  |
| 125 - 80 - 250      | 125               | 80  | 210         | 160 | 16       | 200        | 265 | 110                | 48  | 15  | 400  |
| 125 - 80 - 315      | 125               | 80  | 210         | 160 | 16       | 250        | 315 | 135                | 57  | 17  | 500  |
| 125 - 100 - 200     | 125               | 100 | 210         | 180 | 16       | 200        | 265 | 110                | 48  | 15  | 400  |
| 125 - 100 - 250     | 125               | 100 | 210         | 180 | 16       | 225        | 290 | 200                | 48  | 15  | 450  |
| 125 - 100 - 315     | 125               | 100 | 210         | 180 | 16       | 250        | 315 | 135                | 57  | 17  | 500  |
| قدرت الکتروموتور KW | 1.5               | 2.2 | 3           | 4   | 5.5      | 7.5        | 11  | 15                 | 19  | 22  | 30   |
| کوپلینگ             | 95                | 95  | 110         | 110 | 110      | 110        | 125 | 125                | 125 | 140 | 140  |